

SkyATA

Skype™ Phone_bill_saving USB Dongle

Main Features

- Connect Skype through office desk phone or your home phone; no need of microphone and speaker
- Make a Skype/SkypeOut™ call through PBX desk phone or home phone and receive Skype/SkypeIn™ calls as your **familiar telephone habits**
- **Support Skype/SkypeOut speed dial number and the speed dial list can be exported for back up and imported for use**
- **With SkyATA, people can have a free Skype call to office(Support Skype chat to call office extension number, please refer SkyATA user manual FAQ 28.) or home to save roaming or expensive mobile fee when you are out of office or home**
- Support automatic assigned Skype/SkypeOut callout when phone is off-hook(Skype DOD)
- Support assigned PBX extension number dialing for incoming Skype calls during SkyATA PBX application(Skype DID)
- Accurate 2nd dial(like dialing PBX extension number)
- **“Audio recovery” button resolves Skype call party’s problem to hear each other**
- **Support other IM/VOIP soft phones like Team/Skype for business, Google voice/hangouts, WhatsApp, Zoom, LINE as an audio device(Ear/Microphone function). When SkyATA connects with office existing conference phones, the conference phones will become dedicated Skype conference phones. And the conference phones becomes soft phone conference phones when SkyATA is set at IM mode**
- Support FSK type I Caller ID for Skype calls and display speed dial number for easy return call
- Support popular PBXs and cordless phone sets including DECT, 5.8GHz, 2.4GHz, 900 MHz, ...
- Support international busy tone
- Support 2 REN standard loads and 20, 25, 30 and 50Hz ring signal frequency
- **Support SkyATA software on line upgrade and latest software version check/download**




Minimum System Requirements

- One computer running at 1G Hz or better, 512 MB RAM, one spare USB port and 50M free space
- PC running Windows 10, 8, 7 with Skype version 8.30.0.50 ~ 8.34.0.78 (Only support Traditional Chinese, Simplified Chinese and English Skype GUI now)

Product Specification

- USB 1.1 standard ; USB bus power(No external power needed)
- One USB port for PC & one RJ11 FXS port for PBX analog trunk line or a standard analog or cordless phone
- Dimensions (LxWXH): 81 X 37 X 19 mm

Regintech web and SkyATA YouTube QR code

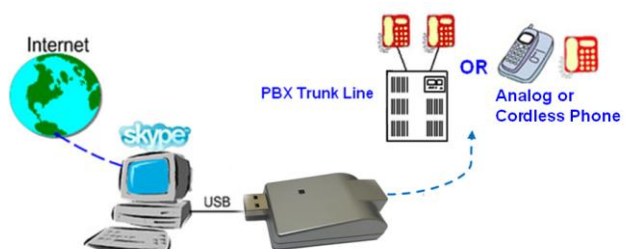

Connect SkyATA with analog PBX trunk line or analog phone